

701-2CMA Maintenance Instructions

Tools & Materials

Quantity & Description

- (qty. 1) Genie® Part Number ACC-57805A331 or Internal retaining ring pliers: 3/8" Bore, 0.038" tips
- (qty. 1) Phillips Screwdriver

Safety Warnings




Failure to abide by any of the safety warnings or operation of this device outside the limits stated below may result in equipment failure and serious injury or death.

- The unit must be depressurized and/or removed from the process line before performing the step.
- Do not exceed any equipment pressure ratings.

Step 1

 The unit must be removed from the process line.

Step 2

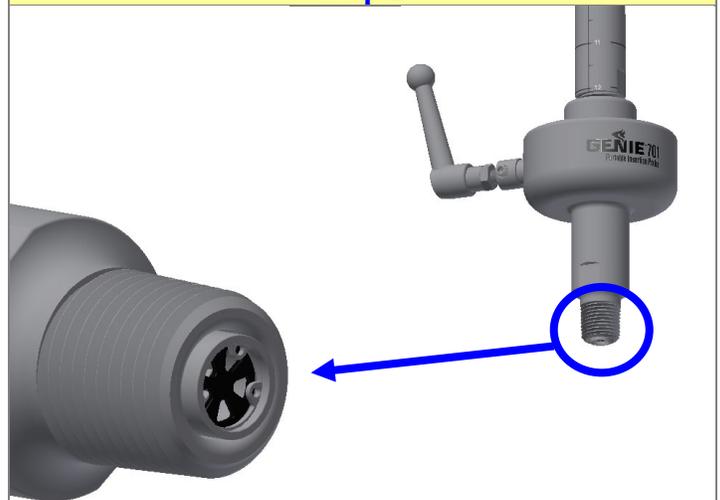


Step 3

Remove and discard the two retaining rings and the star washer.




Step 4

Remove and discard the membrane components.

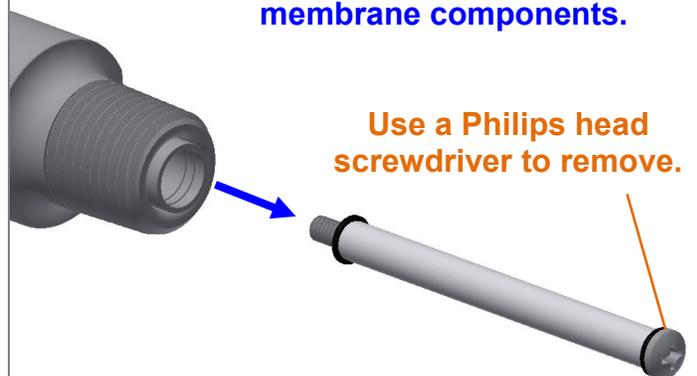

Step 5

Remove and discard the wing nut from the new membrane components.

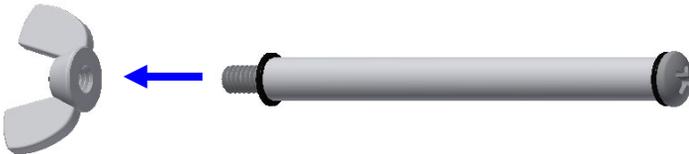

Step 6

Install the membrane components.


Use a Philips head screwdriver to install.



Step 7


Install a retaining ring in the second groove.

Second Groove

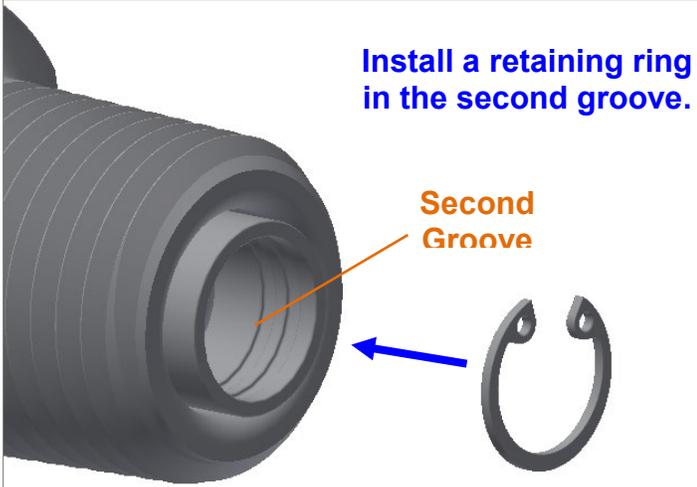


Step 8

Install the star washer.

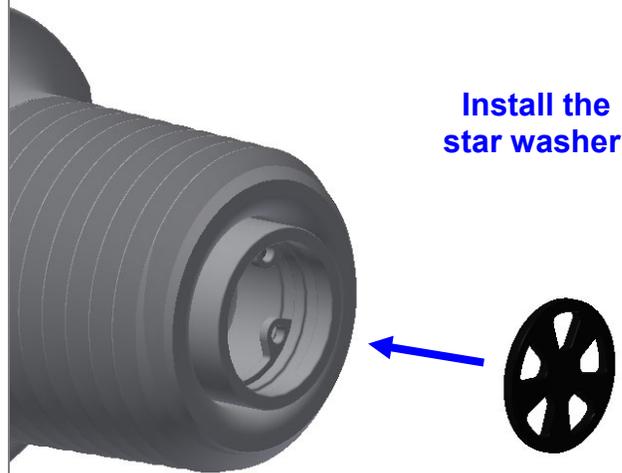

Step 9

Install the other retaining ring in the first groove.

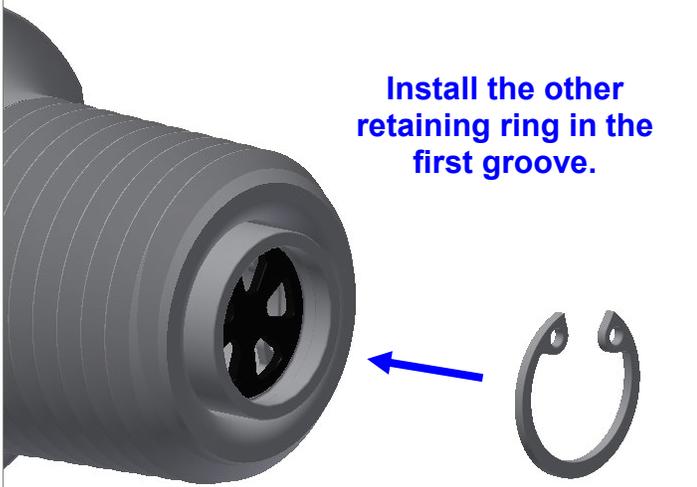

Step 10

The unit is ready to return to the process line.